

Pivo Maxi

LED Downlight

Versatile

Cutout Size  Ø 190mm

HIGH CRI >90Ra
FASHION modules
FOOD modules

AVAILABLE ON REQUEST







Up to **42W**
Power

Up to **6090lm**
Lumen

3000K
4000K
CCT



Product Information	LED Power	26W		42W	
	CRI	>80Ra			
	CCT	3000K	4000K	3000K	4000K
	LED Lumen	3640lm	3790lm	5770lm	6090lm
	LED Efficacy	140lm/W	146lm/W	137lm/W	145lm/W
	LOR	76%			
	Driver	Non-Dimmable Driver (included)			
	Reflector				
		18°	24°	36° included	60°





System includes: fixture and driver

On Request	Article No.	Description	Article No.	Description
	S5.14.0134	Reflector 18° for LED spot Pivo Maxi	-	Dimmable driver available on request
	S5.14.0135	Reflector 24° for LED Spot Pivo Maxi		
	S5.14.0137	Reflector 60° for LED Spot Pivo Maxi		

Pivo Maxi 3000K

H [m]	[lux]	Beam [Ø cm]	Field [Ø cm]
1	5689	70	140
2	1422	130	280
3	632	200	420
4	356	260	560
5	228	330	700

Beam (50%) Angle: 36° Field (10%) Angle: 70°

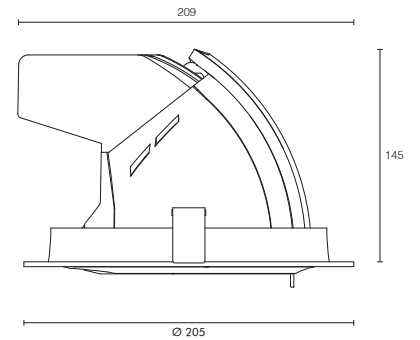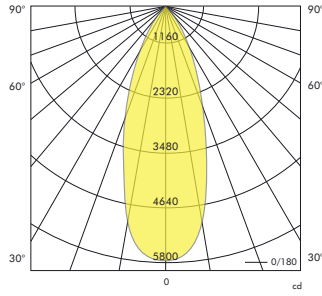

Article No.	Product Name	Color	LED Lumen	CCT	CRI	Cooling	LED Power	Reflector	Cutout Size
S2.11.1714	LED spot Pivo Maxi	Grey	3640lm	3000K	>80Ra	Passive	26W	36°	Ø 190mm
S2.11.1715	LED spot Pivo Maxi	White	3640lm	3000K	>80Ra	Passive	26W	36°	Ø 190mm
S2.11.1716	LED spot Pivo Maxi	Black	3640lm	3000K	>80Ra	Passive	26W	36°	Ø 190mm
S2.11.1717	LED spot Pivo Maxi	Grey	3790lm	4000K	>80Ra	Passive	26W	36°	Ø 190mm
S2.11.1718	LED spot Pivo Maxi	White	3790lm	4000K	>80Ra	Passive	26W	36°	Ø 190mm
S2.11.1719	LED spot Pivo Maxi	Black	3790lm	4000K	>80Ra	Passive	26W	36°	Ø 190mm
S2.11.1720	LED spot Pivo Maxi	Grey	5770lm	3000K	>80Ra	Passive	42W	36°	Ø 190mm
S2.11.1721	LED spot Pivo Maxi	White	5770lm	3000K	>80Ra	Passive	42W	36°	Ø 190mm
S2.11.1722	LED spot Pivo Maxi	Black	5770lm	3000K	>80Ra	Passive	42W	36°	Ø 190mm
S2.11.1723	LED spot Pivo Maxi	Grey	6090lm	4000K	>80Ra	Passive	42W	36°	Ø 190mm
S2.11.1724	LED spot Pivo Maxi	White	6090lm	4000K	>80Ra	Passive	42W	36°	Ø 190mm
S2.11.1725	LED spot Pivo Maxi	Black	6090lm	4000K	>80Ra	Passive	42W	36°	Ø 190mm

Product List

Pivo Medium

LED Downlight


Versatile



AVAILABLE ON REQUEST



Product Information	LED Power	17W		26W	
	CRI	>80Ra			
	CCT	3000K	4000K	3000K	4000K
	LED Lumen	2420lm	2530lm	3640lm	3790lm
	LED Efficacy	142lm/W	149lm/W	140lm/W	146lm/W
	LOR	Up to 90%			
	Driver	Non-Dimmable Driver (included)			
	Optional Reflectors				
		18°	24°	36° included	60°



System includes: fixture and driver




On Request	Article No.	Description	Article No.	Description
	S5.14.0115	Reflector 18° for Pivo Medium	-	Dimmable driver available on request
	S5.14.0116	Reflector 24° for Pivo Medium		
	S5.14.0133	Reflector 60° for Pivo Medium		



Pivo Medium 26W 3000K

H [m]	[lux]	Beam [Ø cm]	Field [Ø cm]
1	4906	70	150
2	1226	140	290
3	545	210	440
4	307	280	580
5	196	350	720

Beam (50%) Angle: 38° Field (10%) Angle: 72°

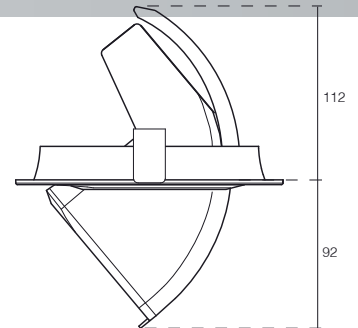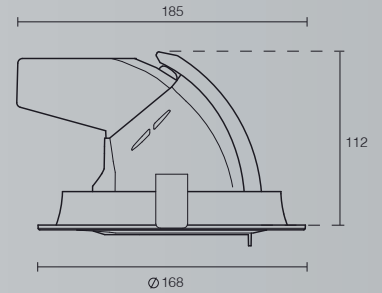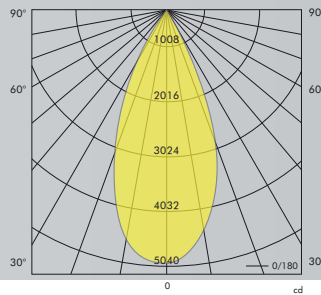

Article No.	Product Name	Color	LED Lumen	CCT	CRI	Cooling	LED Power	Reflector	Cutout Size
S2.11.0970	LED Spot Pivo Medium	Grey	2420lm	3000K	>80Ra	Passive	17W	36°	Ø 154mm
S2.11.0971	LED Spot Pivo Medium	Grey	2530lm	4000K	>80Ra	Passive	17W	36°	Ø 154mm
S2.11.0972	LED Spot Pivo Medium	White	2420lm	3000K	>80Ra	Passive	17W	36°	Ø 154mm
S2.11.0973	LED Spot Pivo Medium	White	2530lm	4000K	>80Ra	Passive	17W	36°	Ø 154mm
S2.11.0974	LED Spot Pivo Medium	Black	2420lm	3000K	>80Ra	Passive	17W	36°	Ø 154mm
S2.11.0975	LED Spot Pivo Medium	Black	2530lm	4000K	>80Ra	Passive	17W	36°	Ø 154mm
S2.11.0976	LED Spot Pivo Medium	Grey	3640lm	3000K	>80Ra	Passive	26W	36°	Ø 154mm
S2.11.0977	LED Spot Pivo Medium	Grey	3790lm	4000K	>80Ra	Passive	26W	36°	Ø 154mm
S2.11.0978	LED Spot Pivo Medium	White	3640lm	3000K	>80Ra	Passive	26W	36°	Ø 154mm
S2.11.0979	LED Spot Pivo Medium	White	3790lm	4000K	>80Ra	Passive	26W	36°	Ø 154mm
S2.11.0980	LED Spot Pivo Medium	Black	3640lm	3000K	>80Ra	Passive	26W	36°	Ø 154mm
S2.11.0981	LED Spot Pivo Medium	Black	3790lm	4000K	>80Ra	Passive	26W	36°	Ø 154mm

Product List




Pivo Mini

LED Downlight

Versatile



Product Information

System Power	19W	19W	19W
CRI	>90Ra	>80Ra	
CCT	2700K	3000K	4000K
LED Lumen	1450lm	1900lm	2000lm
LED Efficacy	91lm/W	119lm/W	125lm/W
LOR	up to 80%		
Driver	1-10V, trailing and leading edge, 500mA Dimmable Driver (included)		
Reflector	 15°	 24°	 36° included



System includes: fixture and driver

On Request




Article No.	Description
S5.14.0144	Reflector 15° for LED spot Pivo Mini
S5.14.0145	Reflector 24° for LED Spot Pivo Mini



Pivo Mini 3000K

H [m]	[lux]	Beam [Ø cm]	Field [Ø cm]
1	2916	60	140
2	729	130	280
3	324	190	430
4	182	260	570
5	117	320	710

Beam (50%) Angle: 36° Field (10%) Angle: 71°

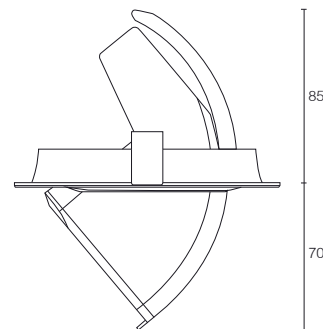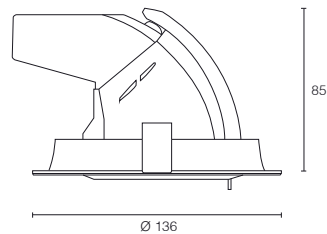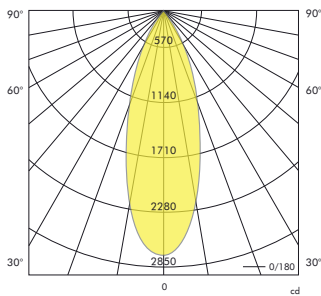

Article No.	Product Name	Color	LED Lumen	CCT	CRI	Cooling	LED Power	Reflector	Cutout Size	Product List
S2.11.1265	LED spot Pivo Mini	White	1450lm	2700K	>90Ra	Passive	16W	36°	Ø 128mm	
S2.11.1266	LED spot Pivo Mini	White	1900lm	3000K	>80Ra	Passive	16W	36°	Ø 128mm	
S2.11.1267	LED spot Pivo Mini	White	2000lm	4000K	>80Ra	Passive	16W	36°	Ø 128mm	